

## PRODUCT DETAILS

|                |                                       |                                                                                    |
|----------------|---------------------------------------|------------------------------------------------------------------------------------|
| PRODUCT CODE   | B20R-AGM                              |  |
| CHARACTERISTIC | Vented Lead-Acid Battery (AGM)        |                                                                                    |
| GROUP SIZE     | NS40                                  |                                                                                    |
| CASE AND LID   | Material : Polypropylene (PP)         |                                                                                    |
|                | Handle : 1pc plastic                  |                                                                                    |
|                | Ledge : No Ledge (NL)                 |                                                                                    |
|                | Vent : centralised vents on the sides |                                                                                    |
|                |                                       | 36 Months Warranty*                                                                |

## DIMENSIONAL SPECIFICATIONS




| OVERALL DIMENSIONS                       | METRIC (mm) |
|------------------------------------------|-------------|
| LENGTH                                   | 197         |
| WIDTH                                    | 129         |
| HEIGHT (bottom to top cover)             | 203         |
| TOTAL HEIGHT (bottom to top of terminal) | 227         |
| APPROXIMATE WEIGHT, kg                   | 11.0        |

| TERMINAL DATA        | POSITIVE          | NEGATIVE    |
|----------------------|-------------------|-------------|
| TYPE                 | JIS               | JIS         |
| TERMINAL HEIGHT (mm) | 17+3/-0           | 17+3/-0     |
| BOTTOM DIAMETER (mm) | 12.7+0/-0.3       | 11.1+0/-0.3 |
| TAPER                | 1:9               | 1:9         |
| POLARITY             | D (Positive Left) |             |

## CAPACITY SPECIFICATIONS

|                          |                                                                  |
|--------------------------|------------------------------------------------------------------|
| COLD CRANKING AMPS (CCA) | 340 CCA                                                          |
|                          | Test reference: AS60095:2022<br>Rated CCA DCH at 18°C for 30 sec |

|                                 |                                                                        |
|---------------------------------|------------------------------------------------------------------------|
| AMPERE-HOUR AT 20-HOUR CAPACITY | 35 min                                                                 |
|                                 | Test reference: AS60095:2022<br>Rated AH DCH at 10.5 V cut-off voltage |

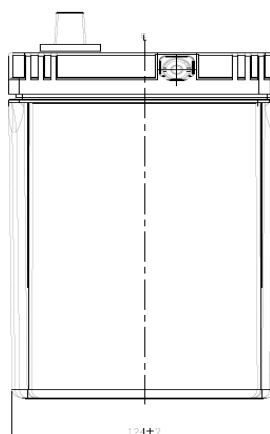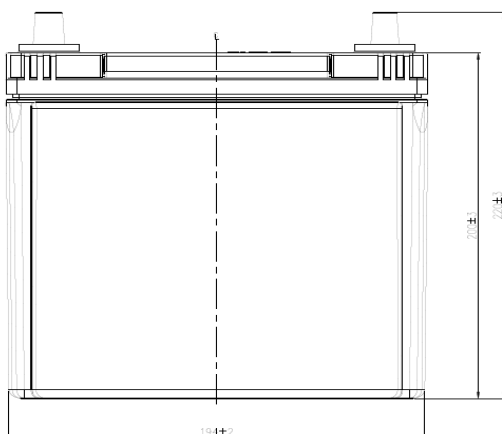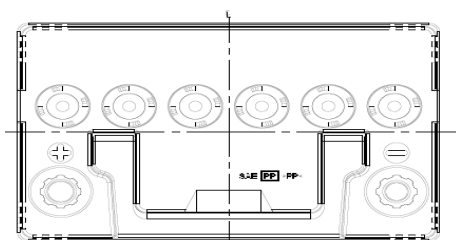

\*Warranty terms and conditions apply

Revision No. 00

Release Date: Feb 2025

B20R-AGM

Product Specification Sheet

Page 1 of 1