

DC12-100AMG(12V100Ah)



Specification


Cells Per Unit	6
Voltage Per Unit	12V
Capacity	100Ah@20hour-rate to 1.75V per cell @25°C
Weight	Approx. 29.0 Kg (Tolerance ±5%)
Internal Resistance	≤6.1 mΩ (Full Charge Condition @25°C)
Terminal	Default F12 (M8) ,F5(M8)&L7 Optional
Max. Discharge Current	1000A (5 sec)
Design Life	12 years
Max. Charging Current	20.0 A
Reference Capacity	C ₃ 73.6Ah C ₅ 85.0Ah C ₁₀ 95.2Ah C ₂₀ 100.0Ah
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



DC-MG (Deep Cycle GEL) series is hybrid GEL battery with 12 years floating design life ,it is ideal for standby or frequent cyclic discharge applications under extreme environments. By using strong grids, high purity lead and patented Gel electrolyte, the DG-MG series offers excellent recovery capability after deep discharge under frequent cyclic discharge use, and can deliver 380 cycles at 100% DOD. Suitable for solar & wind system, CATV, marine, RV and deep discharge UPS, and telecommunication, etc.



Dimensions

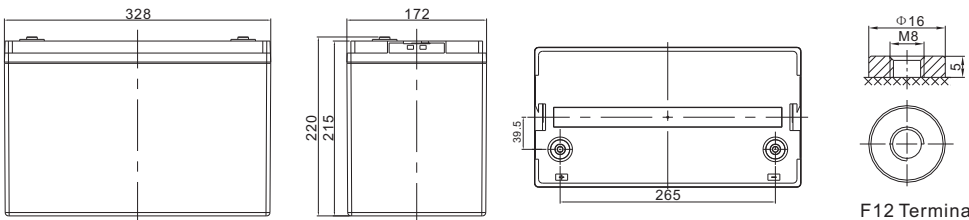

Length	328±2mm (12.9 inches)
Width	172±2mm (6.77 inches)
Height	215±2mm (8.46 inches)
Total Height	220±2mm (8.66 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	228.2	182.7	107.8	60.74	36.17	27.64	22.10	18.80	12.06	10.00	5.183
1.65V	210.2	170.9	102.1	58.67	34.96	26.79	21.44	18.21	11.96	9.905	5.155
1.70V	194.9	160.7	96.83	56.79	34.03	25.66	20.78	17.72	11.77	9.714	5.090
1.75V	178.8	150.5	93.01	55.00	32.72	25.00	20.21	17.22	11.58	9.619	5.000
1.80V	162.7	137.8	89.58	52.56	31.60	24.53	19.74	17.00	11.39	9.524	4.952
1.85V	127.3	114.0	75.96	46.91	28.90	22.83	18.51	15.65	10.73	8.952	4.905

Constant Power Discharge Characteristics : W/Cell (25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	388.7	318.7	195.9	114.0	68.39	52.48	42.59	35.58	23.50	19.61	10.35
1.65V	374.2	309.9	191.3	112.1	66.54	51.17	41.56	34.62	23.31	19.42	10.25
1.70V	349.3	293.3	182.1	108.8	64.88	49.21	40.23	33.76	23.03	19.05	10.16
1.75V	325.0	276.9	175.7	105.8	62.57	48.00	39.29	32.99	22.65	18.86	9.977
1.80V	299.5	255.9	170.0	101.4	61.15	47.73	38.53	32.54	22.28	18.67	9.885
1.85V	237.5	215.0	145.8	91.10	56.31	44.52	36.27	30.10	21.05	17.63	9.792

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.
The battery must be fully charged before the capacity test. The C₂₀ should reach 95% after the first cycle and 100% after the third cycle.


DC12-100AMG(12V100Ah)




Discharge Characteristics Curve

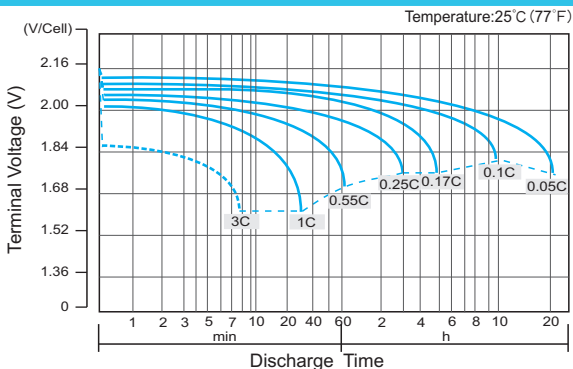


Charge Characteristic Curve for Cycle Use(IUU)

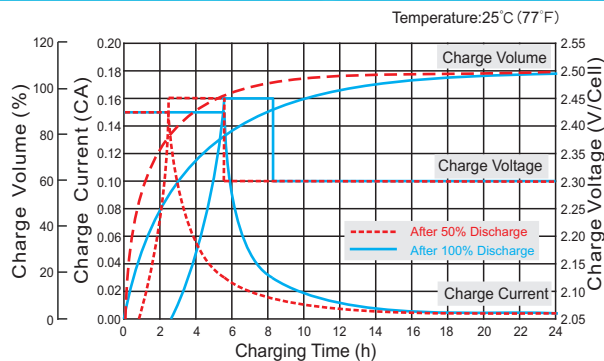


Cycle Life in Relation to Depth of Discharge

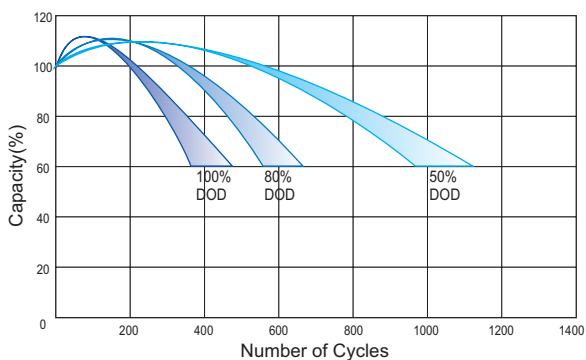


Relationship Between Charging Voltage and Temperature

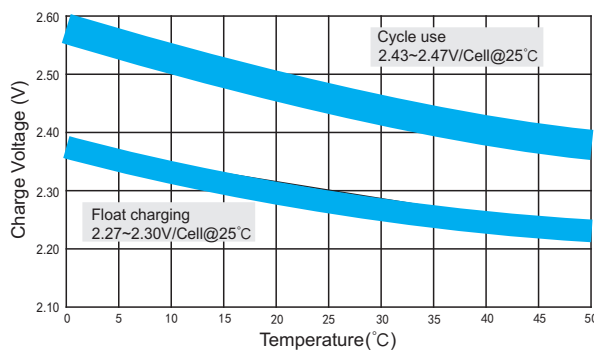


Temperature Effects on Capacity

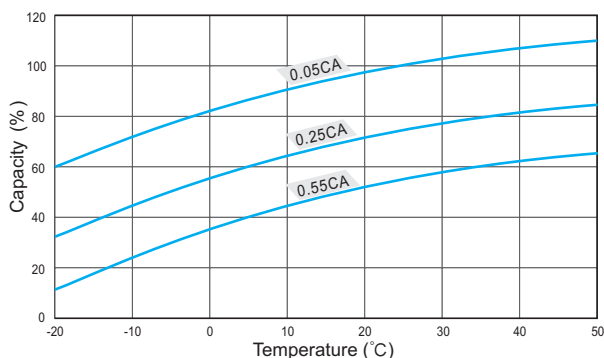


Storage Characteristics

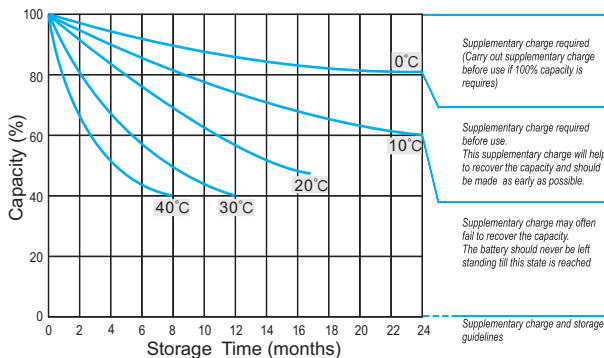

Effect of Temperature on Long Term Life

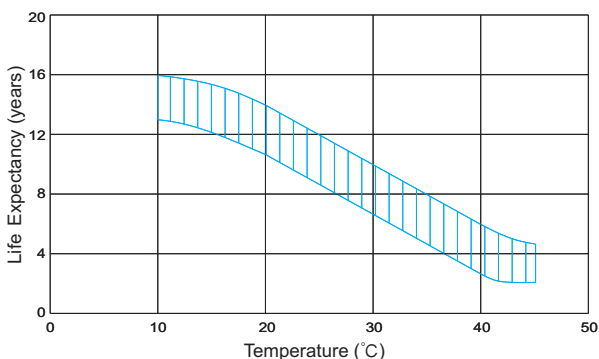

Relationship of OCV And State of Charge(20°C)

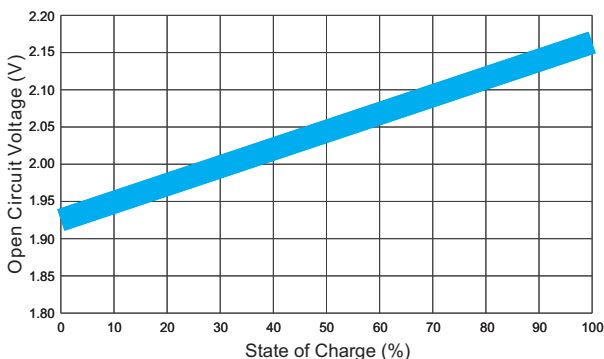

(Note) All above information shall be changed without prior notice, RITAR reserves the right to explain and update the latest information.