



EV12-215(12V215Ah)



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	215Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 63.5 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 3.5 mΩ
Terminal	F22(M8)/F23(M8)
Max. Discharge Current	2150A (5 sec)
Cold Cranking Ampere(CCA)	710A
Maxi. Charging Current	64.5A
Reference Capacity	C3 153.3AH
	C5 174.5AH
	C10 200.0AH
	C20 212.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C
	Charge: 0°C~50°C
	Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



EV (Electric Vehicle) series is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the EV series battery offers reliable performance in high load situations and could provide competitive cycle performance. It is suitable for Electric Vehicle and Golf cart, Floor Machines, Forklifts, Aerial lifts, Robotics, Marine, RV, Mobility and Medical Equipment, and most outdoor application.



ISO 9001



ISO 14001



OHSAS 18001







MH 28539



G4M20206-0910-E-16

Dimensions



Length	382±1mm (15.0 inches)
Width	179±1mm (7.05 inches)
Height	351±1mm (13.8 inches)
Total Height	370±1mm (14.6 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	470.6	370.1	223.4	118.5	72.1	55.9	44.4	37.8	25.4	21.1	11.19
1.65V	444.7	335.2	195.0	114.4	69.8	54.2	43.2	36.8	25.1	20.8	11.02
1.70V	409.4	314.0	186.3	110.7	67.5	52.7	42.0	35.8	24.7	20.5	10.88
1.75V	374.7	292.2	178.1	106.7	65.2	51.1	40.9	34.9	24.4	20.3	10.75
1.80V	339.2	269.8	170.2	102.6	62.9	49.6	39.8	34.0	24.0	20.0	10.64
1.85V	277.2	223.9	146.6	92.0	57.6	45.8	37.0	31.7	22.5	18.8	10.11

Constant Power Discharge Characteristics : WPC(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	799.9	647.0	405.7	222.7	136.7	106.8	85.2	72.8	49.6	41.5	22.0
1.65V	770.5	594.7	357.8	216.3	133.0	103.9	83.2	71.2	49.1	41.0	21.7
1.70V	722.3	565.3	345.4	210.5	129.3	101.5	81.2	69.6	48.5	40.5	21.5
1.75V	673.1	533.7	333.6	204.1	125.4	98.9	79.5	68.1	47.9	40.0	21.3
1.80V	619.9	499.8	322.0	197.4	121.5	96.2	77.5	66.5	47.2	39.5	21.1
1.85V	515.7	420.6	280.1	178.1	112.0	89.4	72.3	62.3	44.4	37.3	20.0

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


The battery must be fully charged before the capacity test. The C10 should reach 95% after the first cycle and 100% after the third cycle.

If F22 terminal is selected and the discharge current is more than 0.25C, the threaded terminal of terminal F22 shall not be used in connection, but the lead pole shall be connected.


EV12-215(12V215Ah)




Charge Characteristic Curve for Cycle Use(IUUU)

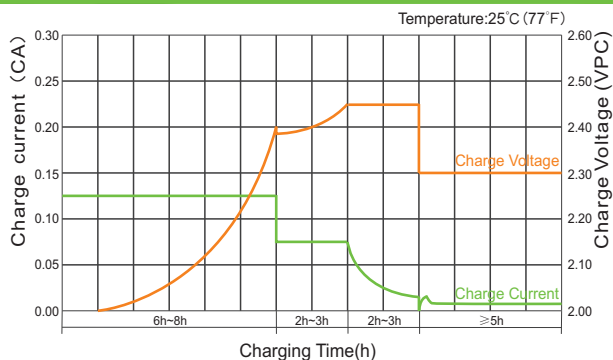


Charge Characteristic Curve For Cycle Use(IUI)

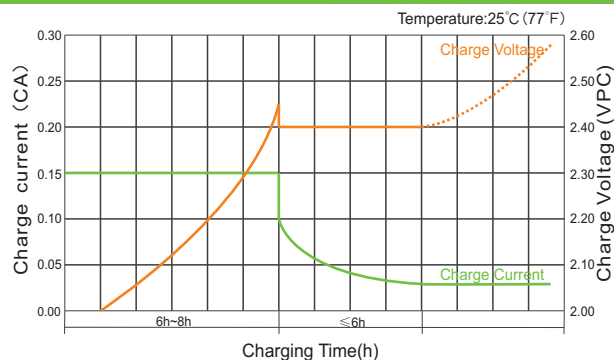


Cycle Life in Relation to Depth of Discharge

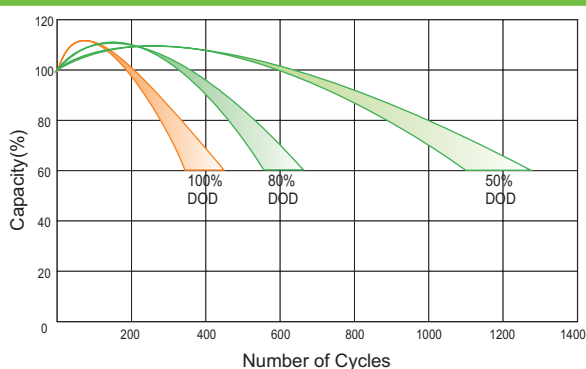


Storage Characteristics

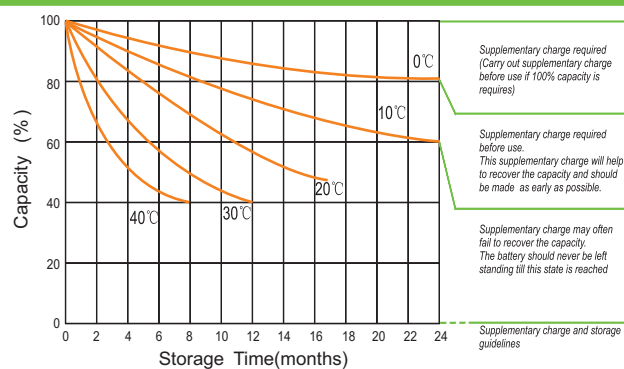


Discharge Characteristics Curve

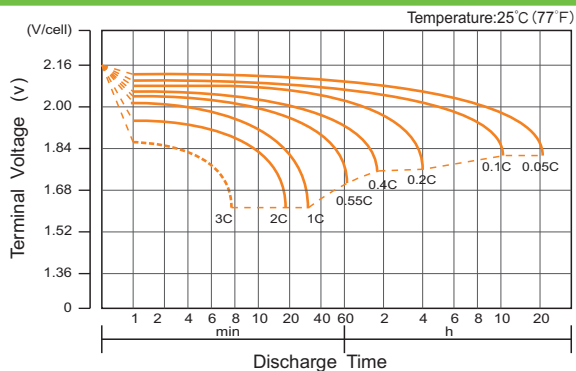


Relationship Between Charging Voltage and Temperature

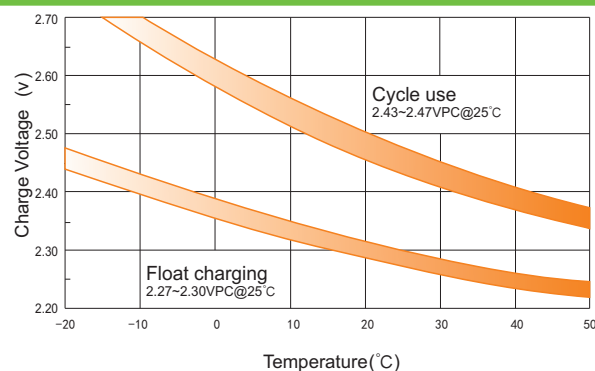

Relationship of OCV And State of Charge(20°C)

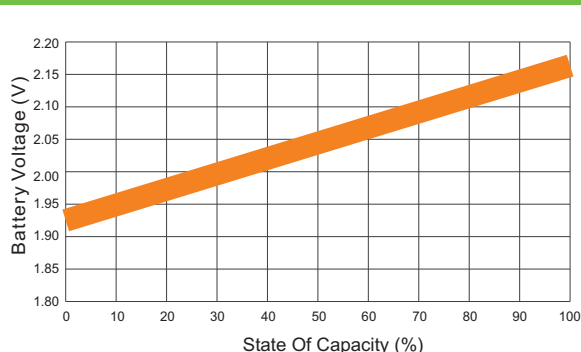

Temperature Effects on Capacity

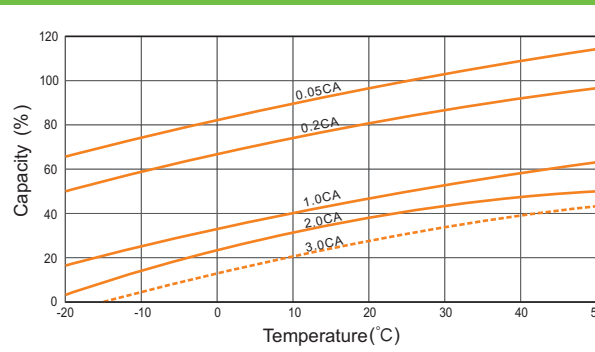

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.

HENGYANG RITAR POWER CO.,LTD.
URL: www.ritarpower.com

Add: No.1 Huagong Road, Songmu Industrial Park, Shigu District, Hengyang, Hunan, China 421001
Tel: +86-734-8595528 Fax: +86-734-8595518 E-mail: sales@ritarpower.com

Version 20A-0