SUPERCHARGE BATTERIES
MORE POWER. LONGER LIFE

PRODUCT DETAILS

PRODUCT CODE	**MF55**		
WARRANTY	50 months (Private Passenger Use) *		
CHARACTERISTIC	Sealed Maintenance Free Lead Acid Battery		
GROUP SIZE	LB2		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	1 pc Plastic
	Ledges	:	End and Front Ledge (EL & FL)
	Venting System	:	Centralized system with Degassing vents on sides

DIMENSIONS, WEIGHT, AND LAYOUT

OVERALL DIMENSIONS	METRIC
LENGTH, mm	242
WIDTH, mm	175
CASE HEIGHT, mm	153
TOTAL HEIGHT, mm	175
APPROXIMATE WEIGHT, kg	13.75

TERMINAL DATA	METRIC
TYPE	SAE
TERMINAL HEIGHT, mm	18.5±1.5
BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER	1:9
POLARITY	C (Positive Right)

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	640 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	62 Ah
RESERVE CAPACITY (RC)	105 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

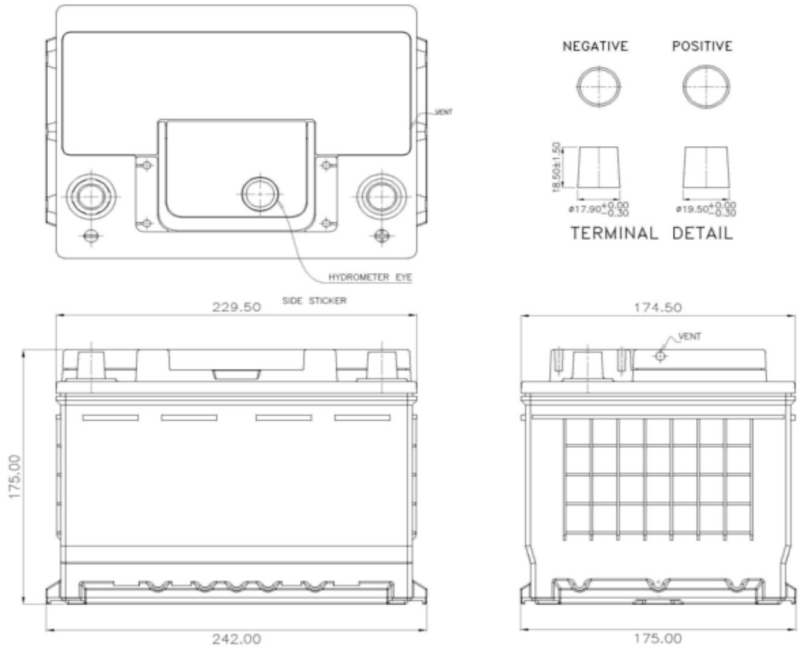

*Warranty upon registration /Warranty terms and conditions apply.
**Based on normal engine bay temperature.
(Note) The company reserves the right to update the information above without prior notice.

Revision No. **23-001**