

## PRODUCT DETAILS

|                |                                               |   |                                                  |
|----------------|-----------------------------------------------|---|--------------------------------------------------|
| PRODUCT CODE   | MFULD26L                                      |   |                                                  |
| WARRANTY       | 60 months (Private Passenger Use) *           |   |                                                  |
| CHARACTERISTIC | Accessible Maintenance Free Lead Acid Battery |   |                                                  |
| GROUP SIZE     | N50                                           |   |                                                  |
| CASE AND LID   | Material                                      | : | Polypropylene (PP)                               |
|                | Handle                                        | : | 1 pc Plastic                                     |
|                | Ledges                                        | : | Front Ledge (FL)                                 |
|                | Venting System                                | : | Centralized system with Degassing vents on sides |
|                |                                               |   |                                                  |



## DIMENSIONS, WEIGHT, AND LAYOUT


| OVERALL DIMENSIONS     | METRIC |
|------------------------|--------|
| LENGTH, mm             | 259    |
| WIDTH, mm              | 173    |
| CASE HEIGHT, mm        | 202    |
| TOTAL HEIGHT, mm       | 223    |
| APPROXIMATE WEIGHT, kg | 18.16  |

| TERMINAL DATA       | METRIC                                         |
|---------------------|------------------------------------------------|
| TYPE                | SAE                                            |
| TERMINAL HEIGHT, mm | 18.5±1.5                                       |
| BOTTOM DIAMETER, mm | Positive: 19.5+0/-0.3<br>Negative: 17.9+0/-0.3 |
| TAPER               | 1:9                                            |
| POLARITY            | C (Positive Right)                             |

## CAPACITY SPECIFICATIONS

|                                 |          |
|---------------------------------|----------|
| COLD CRANKING AMPS (CCA)        | 750 CCA  |
| AMPERE-HOUR AT 20-HOUR CAPACITY | 85 Ah    |
| RESERVE CAPACITY (RC)           | 150 mins |

|                        |                                                    |
|------------------------|----------------------------------------------------|
| MAX CHARGING VOLTAGE   | 14.8 V at 25°C                                     |
| FLOAT CHARGING VOLTAGE | 13.5 V – 13.8 V at 25°C                            |
| OPERATING TEMPERATURE  | -40°C to 80°C**<br>Optimal Temperature: 25°C ± 5°C |

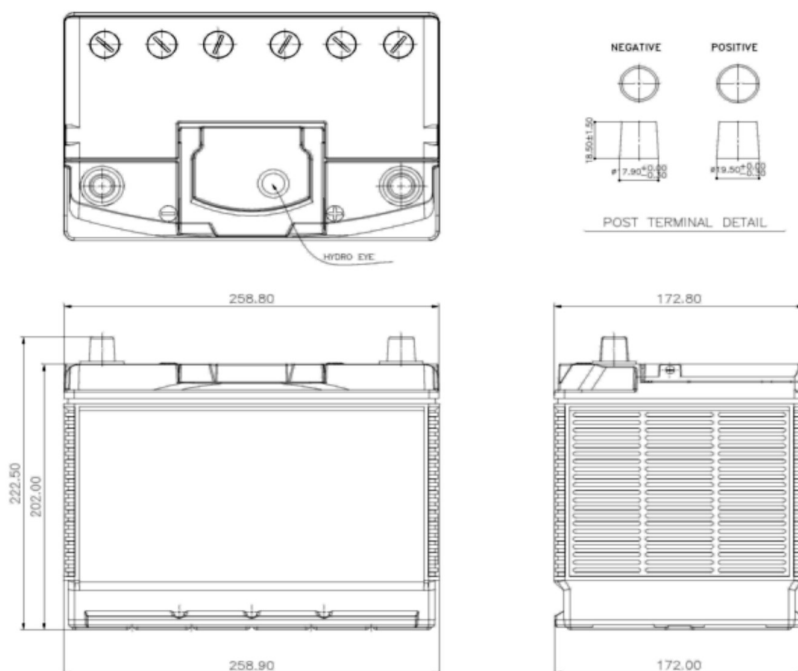

\*Warranty upon registration /Warranty terms and conditions apply.

\*\*Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. **23-001**