

PRODUCT DETAILS

PRODUCT CODE	MRV70		
WARRANTY	24 months (Private/Commercial Use) *		
CHARACTERISTIC	Accessible Maintenance Free Lead Acid Battery		
GROUP SIZE	N70		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	1 pc Plastic
	Ledges	:	Front Ledge (FL)
	Venting System	:	Centralized system with Degassing vents on sides



DIMENSIONS, WEIGHT, AND LAYOUT

OVERALL DIMENSIONS		METRIC
LENGTH, mm		304
WIDTH, mm		173
CASE HEIGHT, mm		203
TOTAL HEIGHT, mm		223
APPROXIMATE WEIGHT, kg		25.98

TERMINAL DATA		METRIC
TYPE		Dual Marine
TERMINAL HEIGHT, mm		18.5±1.5
BOTTOM DIAMETER, mm		Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER		1:9
POLARITY		D (Positive Left)

CAPACITY SPECIFICATIONS


COLD CRANKING AMPS (CCA)	760 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	105 Ah
RESERVE CAPACITY (RC)	160 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

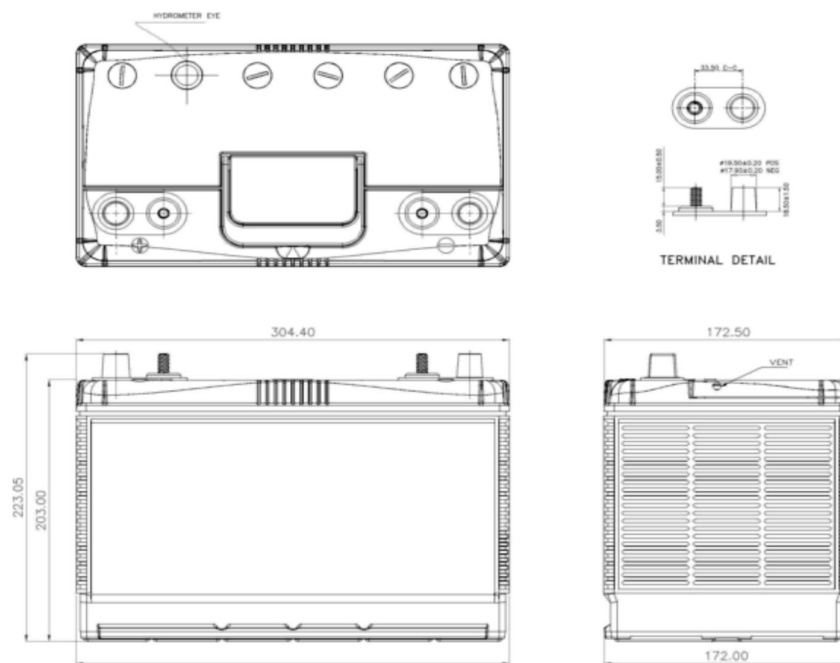

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. **23-001**