

**PRODUCT DETAILS**

<b>PRODUCT CODE</b>	<b>MRV70L</b>
<b>WARRANTY</b>	24 months (Private/Commercial Use) *
<b>CHARACTERISTIC</b>	Accessible Maintenance Free Lead Acid Battery
<b>GROUP SIZE</b>	N70
<b>CASE AND LID</b>	Material : Polypropylene (PP)
	Handle : 1 pc Plastic
	Ledges : Front Ledge (FL)
	Venting : Centralized system with
	System : Degassing vents on sides



**DIMENSIONS, WEIGHT, AND LAYOUT**


OVERALL DIMENSIONS	METRIC
LENGTH, mm	304
WIDTH, mm	173
CASE HEIGHT, mm	203
TOTAL HEIGHT, mm	223
APPROXIMATE WEIGHT, kg	25.98

TERMINAL DATA	METRIC
TYPE	Dual Marine
TERMINAL HEIGHT, mm	18.5±1.5
BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER	1:9
POLARITY	C (Positive Right)

**CAPACITY SPECIFICATIONS**

COLD CRANKING AMPS (CCA)	760 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	105 Ah
RESERVE CAPACITY (RC)	160 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

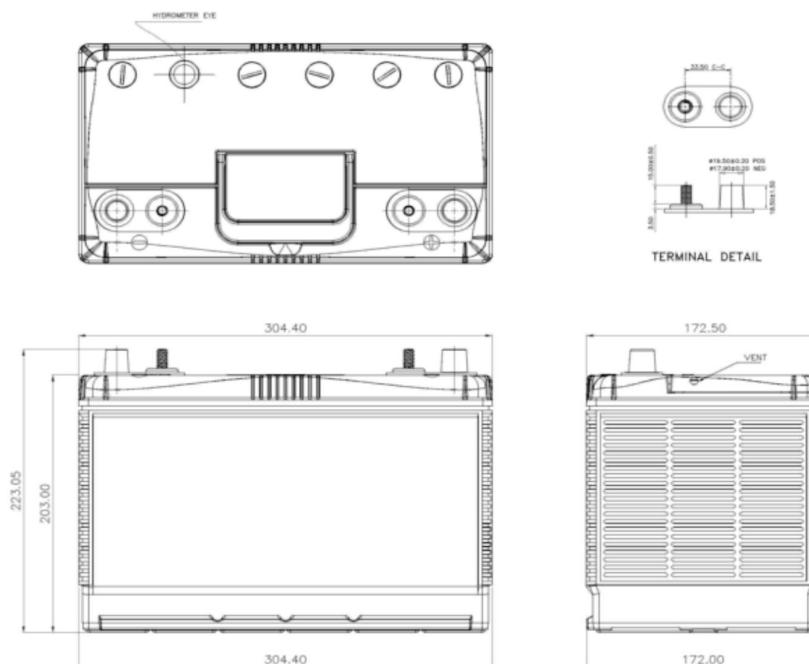

\*Warranty terms and conditions apply.

\*\*Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.