

PRODUCT DETAILS

| PRODUCT CODE | NS40ZA | |
|----------------|---|--|
| WARRANTY | 30 months (Private Passenger Use) * | |
| CHARACTERISTIC | Sealed Maintenance Free Lead Acid Battery | |
| GROUP SIZE | NS40 | |
| CASE AND LID | Material : Polypropylene (PP) | |
| | Handle : 1 pc Plastic | |
| | Ledges : No Ledge (NL) | |
| | Venting Centralized system with | |
| | System Degassing vents on sides | |



DIMENSIONS, WEIGHT, AND LAYOUT


| OVERALL DIMENSIONS | METRIC |
|------------------------|--------|
| LENGTH, mm | 196 |
| WIDTH, mm | 128 |
| CASE HEIGHT, mm | 199 |
| TOTAL HEIGHT, mm | 219 |
| APPROXIMATE WEIGHT, kg | 9.84 |

| TERMINAL DATA | METRIC |
|---------------------|--|
| ТҮРЕ | SAE |
| TERMINAL HEIGHT, mm | 18.5±1.5 |
| BOTTOM DIAMETER, mm | Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3 |
| TAPER | 1:9 |
| POLARITY | D (Positive Left) |

CAPACITY SPECIFICATIONS

| COLD CRANKING AMPS (CCA) | 340 CCA |
|---------------------------------|---------|
| AMPERE-HOUR AT 20-HOUR CAPACITY | 38 Ah |
| RESERVE CAPACITY (RC) | 55 mins |

| MAX CHARGING VOLTAGE | 14.8 V at 25°C |
|---------------------------|--|
| FLOAT CHARGING VOLTAGE | 13.5 V – 13.8 V at 25°C |
| OPERATING TEMPERATURE | -40°C to 80° C** Optimal Temperature: 25° C $\pm 5^{\circ}$ C |

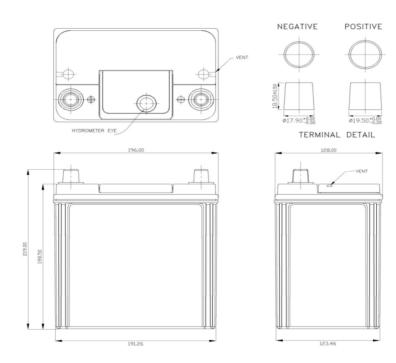

^{*}Warranty terms and conditions apply.
**Based on normal engine bay temperature.