


PRODUCT DETAILS

PRODUCT CODE	NS60LS	
WARRANTY	30 months (Private Passenger Use) *	
CHARACTERISTIC	Sealed Maintenance Free Lead Acid Battery	
GROUP SIZE	NS60	
CASE AND LID	Material : Polypropylene (PP)	
	Handle : 1 pc Plastic	
	Ledges : No Ledge (NL)	
	Venting : Centralized system with	
	System : Degassing vents on sides	

DIMENSIONS, WEIGHT, AND LAYOUT


OVERALL DIMENSIONS	METRIC
LENGTH, mm	236
WIDTH, mm	128
CASE HEIGHT, mm	200
TOTAL HEIGHT, mm	220
APPROXIMATE WEIGHT, kg	11.79

TERMINAL DATA	METRIC
TYPE	SAE
TERMINAL HEIGHT, mm	18.5±1.5
BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER	1:9
POLARITY	C (Positive Right)

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	450 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	48 Ah
RESERVE CAPACITY (RC)	75 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

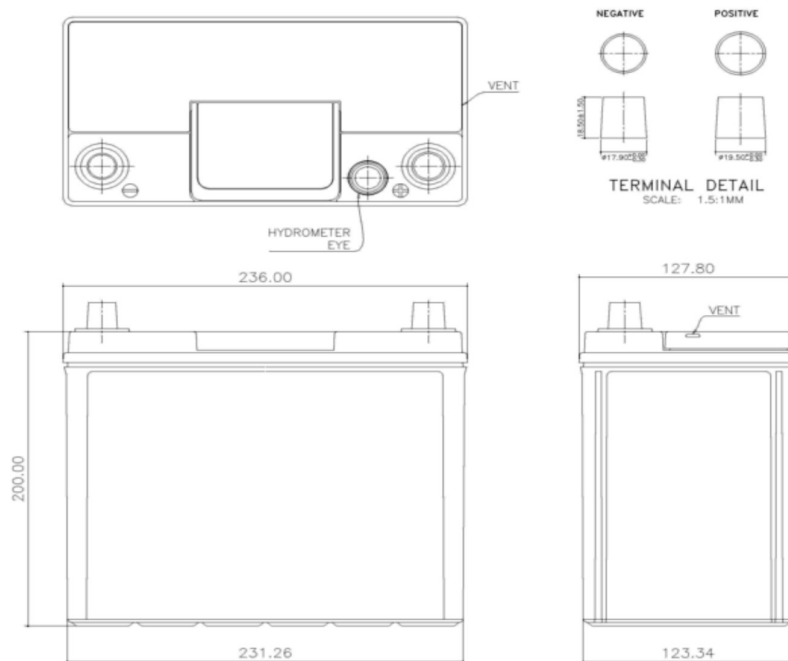

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.