


**PRODUCT DETAILS**

<b>PRODUCT CODE</b>	<b>NS60R</b>	
<b>WARRANTY</b>	30 months (Private Passenger Use) *	
<b>CHARACTERISTIC</b>	Sealed Maintenance Free Lead Acid Battery	
<b>GROUP SIZE</b>	NS60	
<b>CASE AND LID</b>	Material : Polypropylene (PP)	
	Handle : 1 pc Plastic	
	Ledges : No Ledge (NL)	
	Venting System : Centralized system with Degassing vents on sides	

**DIMENSIONS, WEIGHT, AND LAYOUT**


OVERALL DIMENSIONS	METRIC
LENGTH, mm	236
WIDTH, mm	128
CASE HEIGHT, mm	200
TOTAL HEIGHT, mm	220
APPROXIMATE WEIGHT, kg	11.74

TERMINAL DATA	METRIC
TYPE	JIS
TERMINAL HEIGHT, mm	18.5±1.5
BOTTOM DIAMETER, mm	Positive: 14.7+0/-0.3 Negative: 13.0+0/-0.3
TAPER	1:9
POLARITY	D (Positive Left)

**CAPACITY SPECIFICATIONS**

COLD CRANKING AMPS (CCA)	450 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	48 Ah
RESERVE CAPACITY (RC)	75 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

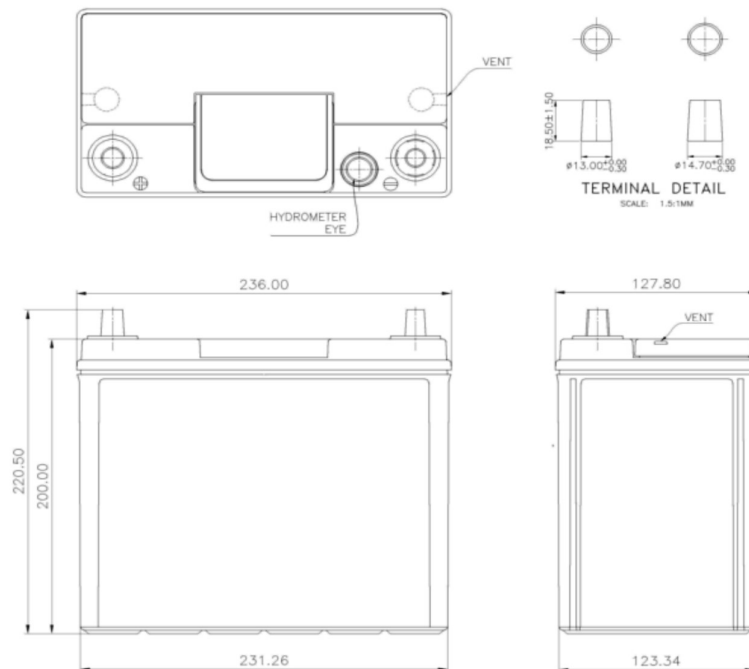

\*Warranty terms and conditions apply.

\*\*Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.