



## RT650(6V5.0Ah)

### Specification

|                                    |                                                                                                                                                                                                                           |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cells Per Unit                     | 3                                                                                                                                                                                                                         |
| Voltage Per Unit                   | 6V                                                                                                                                                                                                                        |
| Nominal Capacity                   | 5.0Ah@20hour-rate to 1.75V per cell @25°C                                                                                                                                                                                 |
| Weight                             | Approx. 0.70 Kg (Tolerance $\pm 5.0\%$ )                                                                                                                                                                                  |
| Internal Resistance                | $\leq 24$ m $\Omega$ (Full Charge Condition @25°C)                                                                                                                                                                        |
| Terminal                           | Default F1,F2 Optional                                                                                                                                                                                                    |
| Max. Discharge Current             | 50A (5 sec)                                                                                                                                                                                                               |
| Short Circuit Current              | 250A                                                                                                                                                                                                                      |
| Design Life                        | 6~8 years                                                                                                                                                                                                                 |
| Max. Charging Current              | 1.50 A                                                                                                                                                                                                                    |
| Reference Capacity                 | C <sub>3</sub> 3.38Ah<br>C <sub>5</sub> 4.25Ah<br>C <sub>10</sub> 4.67Ah<br>C <sub>20</sub> 5.00Ah                                                                                                                        |
| Standby Use Voltage                | 6.84 V~6.96 V @ 25°C<br>Temperature Compensation: -3mV/°C/Cell                                                                                                                                                            |
| Cycle Use Voltage                  | 7.30 V~7.40 V @ 25°C<br>Temperature Compensation: -4mV/°C/Cell                                                                                                                                                            |
| Operating Temperature Range        | Discharge: -20°C~60°C<br>Charge: 0°C~50°C<br>Storage: -20°C~60°C                                                                                                                                                          |
| Normal Operating Temperature Range | 25°C $\pm 5^\circ$ C                                                                                                                                                                                                      |
| Self Discharge                     | RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using. |
| Container Material                 | A.B.S. UL94-HB, UL94-V0 Optional.                                                                                                                                                                                         |



RT series is a general purpose battery with 6~8 years design life in float service. It meets with IEC, JIS, BS, GB/T and YD/T standards. With advanced AGM valve regulated technology and high purity raw material, the RT series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, medical equipment, emergency light and security system applications.



ISO 9001



ISO 14001



ISO 45001




MH 28539



BSTXD210316008517EC

### Dimensions

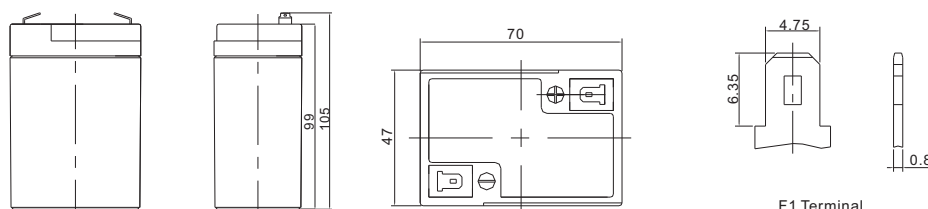

|              |                                |
|--------------|--------------------------------|
| Length       | 70 $\pm 1.5$ mm (2.76 inches)  |
| Width        | 47 $\pm 1.5$ mm (1.85 inches)  |
| Height       | 99 $\pm 1.5$ mm (3.90 inches)  |
| Total Height | 105 $\pm 1.5$ mm (4.13 inches) |
| Terminal     | Value                          |
| M5           | 6~7 N*m                        |
| M6           | 8~10 N*m                       |
| M8           | 10~12 N*m                      |

Unit: mm

#### Constant Current Discharge Characteristics : A (25°C)

| F.V/Time | 5MIN  | 10MIN | 15MIN | 30MIN | 1HR   | 2HR   | 3HR   | 4HR   | 5HR   | 8HR   | 10HR  | 20HR  |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V    | 18.97 | 13.41 | 9.692 | 5.567 | 3.055 | 1.876 | 1.410 | 1.138 | 0.943 | 0.607 | 0.493 | 0.260 |
| 1.65V    | 17.64 | 12.67 | 9.266 | 5.344 | 2.950 | 1.816 | 1.366 | 1.108 | 0.919 | 0.600 | 0.487 | 0.256 |
| 1.70V    | 15.92 | 11.66 | 8.679 | 5.108 | 2.854 | 1.756 | 1.329 | 1.077 | 0.895 | 0.591 | 0.480 | 0.253 |
| 1.75V    | 14.26 | 10.68 | 8.076 | 4.882 | 2.750 | 1.695 | 1.290 | 1.050 | 0.872 | 0.583 | 0.473 | 0.250 |
| 1.80V    | 12.52 | 9.664 | 7.457 | 4.666 | 2.645 | 1.634 | 1.250 | 1.020 | 0.850 | 0.573 | 0.467 | 0.248 |
| 1.85V    | 9.939 | 7.898 | 6.188 | 4.019 | 2.372 | 1.497 | 1.155 | 0.948 | 0.792 | 0.538 | 0.440 | 0.235 |

#### Constant Power Discharge Characteristics : W/Cell (25°C)


| F.V/Time | 5MIN  | 10MIN | 15MIN | 30MIN | 1HR   | 2HR   | 3HR   | 4HR   | 5HR   | 8HR   | 10HR  | 20HR  |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V    | 31.45 | 22.79 | 16.94 | 10.11 | 5.741 | 3.555 | 2.693 | 2.185 | 1.818 | 1.186 | 0.969 | 0.513 |
| 1.65V    | 29.58 | 21.95 | 16.44 | 9.809 | 5.576 | 3.458 | 2.621 | 2.134 | 1.778 | 1.175 | 0.959 | 0.505 |
| 1.70V    | 27.30 | 20.58 | 15.63 | 9.469 | 5.428 | 3.363 | 2.561 | 2.084 | 1.737 | 1.159 | 0.945 | 0.500 |
| 1.75V    | 25.00 | 19.18 | 14.75 | 9.144 | 5.261 | 3.260 | 2.495 | 2.038 | 1.699 | 1.145 | 0.934 | 0.494 |
| 1.80V    | 22.42 | 17.66 | 13.82 | 8.828 | 5.089 | 3.159 | 2.427 | 1.987 | 1.661 | 1.128 | 0.923 | 0.490 |
| 1.85V    | 18.17 | 14.69 | 11.63 | 7.679 | 4.593 | 2.911 | 2.254 | 1.854 | 1.555 | 1.062 | 0.871 | 0.466 |

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.  
The battery must be fully charged before the capacity test. The C<sub>20</sub> should reach 95% after the first cycle and 100% after the third cycle.


# RT650(6V5.0Ah)




**Discharge Characteristics Curve**

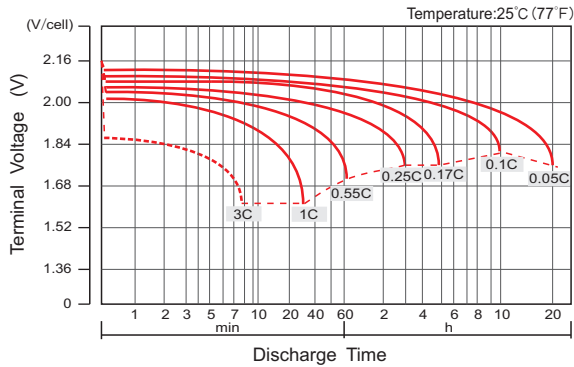


**Charge Characteristic Curve For Standby Use(IU)**

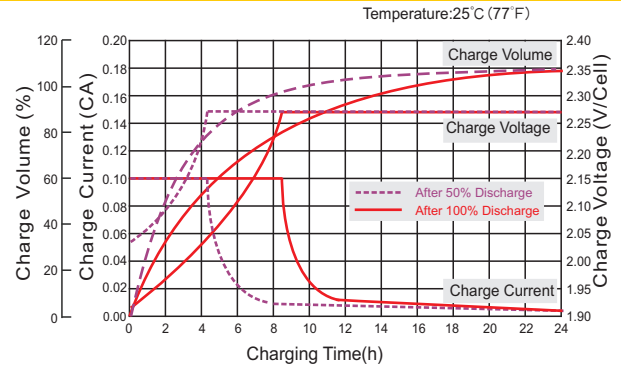


**Cycle Life In Relation To Depth Of Discharge**

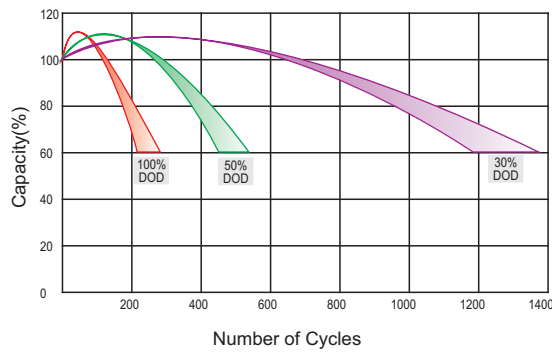


**Relationship Between Charging Voltage And Temperature**

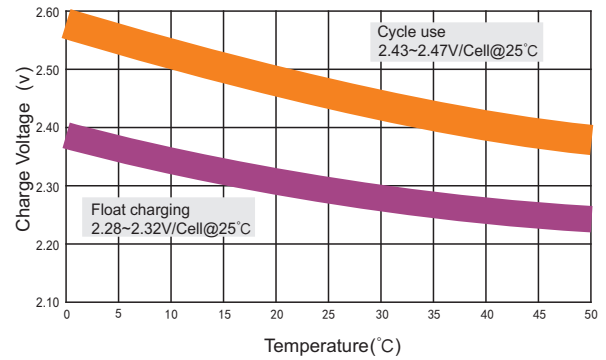


**Temperature Effects On Capacity**

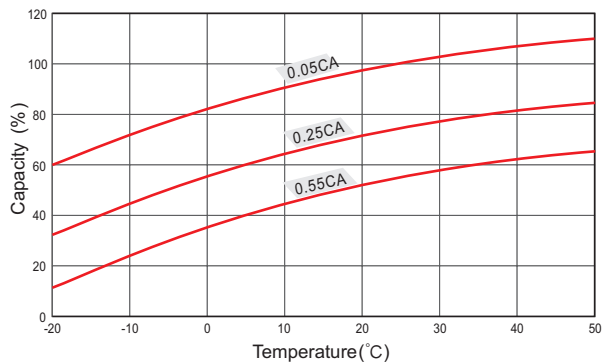


**Storage Characteristics**

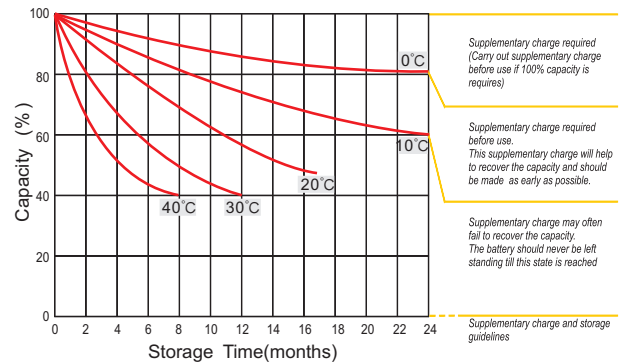

**Effect Of Temperature On Long Term Life**

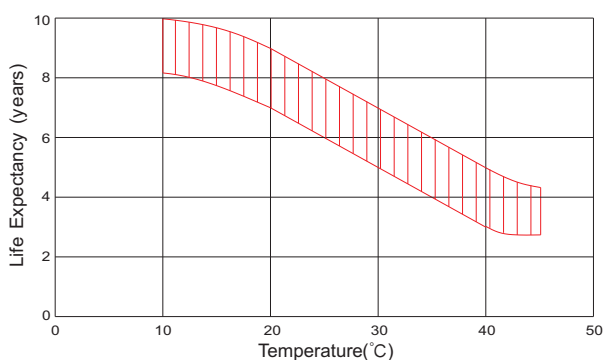

**Life Characteristics Of Standby Use**

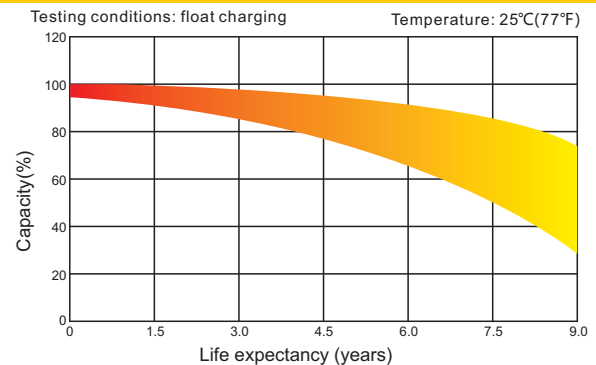

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.