

**PRODUCT DETAILS**

|                |   |
|----------------|---|
| PRODUCT CODE   | <b>SMF58</b>  |
| WARRANTY       | 40 months (Private Passenger Use) *                               |
| CHARACTERISTIC | Sealed Maintenance Free Lead Acid Battery                         |
| GROUP SIZE     | A46   |
| CASE AND LID   | Material : Polypropylene (PP)                                     |
|                | Handle : 1 pc Plastic   |
|                | Ledges : End and Front Ledge (FL & EL)                            |
|                | Venting System : Centralized system with Degassing vents on sides |



**DIMENSIONS, WEIGHT, AND LAYOUT**


| OVERALL DIMENSIONS     | METRIC |
|------------------------|--------|
| LENGTH, mm             | 228    |
| WIDTH, mm              | 171    |
| CASE HEIGHT, mm        | 182    |
| TOTAL HEIGHT, mm       | 208    |
| APPROXIMATE WEIGHT, kg | 15.03  |

| TERMINAL DATA       | METRIC   |
|---------------------|--|
| TYPE                | DFP  |
| TERMINAL HEIGHT, mm | 24.0±0.2                                       |
| BOTTOM DIAMETER, mm | Positive: 20.1+0/-0.2<br>Negative: 18.5+0/-0.2 |
| TAPER               | 1:9  |
| POLARITY            | C (Positive Right)                             |

**CAPACITY SPECIFICATIONS**

|                                 |         |
|---------------------------------|---------|
| COLD CRANKING AMPS (CCA)        | 550 CCA |
| AMPERE-HOUR AT 20-HOUR CAPACITY | 50 Ah   |
| RESERVE CAPACITY (RC)           | 95 mins |

|                        |  |
|------------------------|--|
| MAX CHARGING VOLTAGE   | 14.8 V at 25°C                                     |
| FLOAT CHARGING VOLTAGE | 13.5 V – 13.8 V at 25°C                            |
| OPERATING TEMPERATURE  | -40°C to 80°C**<br>Optimal Temperature: 25°C ± 5°C |

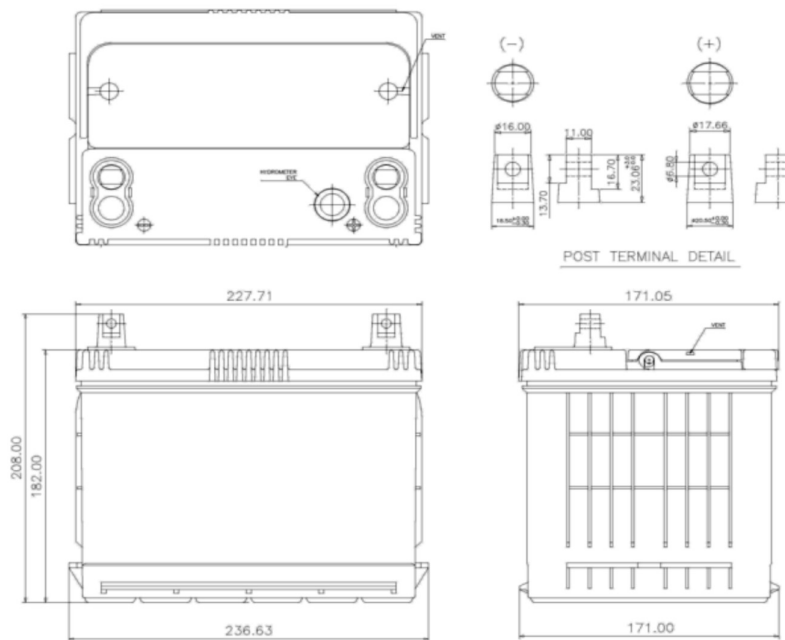

\*Warranty upon registration /Warranty terms and conditions apply.

\*\*Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.