


## PRODUCT DETAILS

|                |   |   |  |
|----------------|---|---|--|
| PRODUCT CODE   | SMFU1                                     |   |  |
| WARRANTY       | 12 months (Private/Commercial Use) *      |   |  |
| CHARACTERISTIC | Sealed Maintenance Free Lead Acid Battery |   |  |
| GROUP SIZE     | GU1                                       |   |  |
| CASE AND LID   | Material                                  | : | Polypropylene (PP)                               |
|                | Handle                                    | : | 1 pc Plastic                                     |
|                | Ledges                                    | : | No Ledge (NL)                                    |
|                | Venting System                            | : | Centralized system with Degassing vents on sides |



## DIMENSIONS, WEIGHT, AND LAYOUT


| OVERALL DIMENSIONS     | METRIC |
|------------------------|--------|
| LENGTH, mm             | 196    |
| WIDTH, mm              | 128    |
| CASE HEIGHT, mm        | 159    |
| TOTAL HEIGHT, mm       | 184    |
| APPROXIMATE WEIGHT, kg | 7.72   |

| TERMINAL DATA       | METRIC            |
|---------------------|-------------------|
| TYPE                | U1                |
| TERMINAL HEIGHT, mm | 23.5              |
| BOTTOM DIAMETER, mm | -                 |
| TAPER               | -                 |
| POLARITY            | D (Positive Left) |

## CAPACITY SPECIFICATIONS

|                                 |         |
|---------------------------------|---------|
| COLD CRANKING AMPS (CCA)        | 260 CCA |
| AMPERE-HOUR AT 20-HOUR CAPACITY | 27 Ah   |
| RESERVE CAPACITY (RC)           | 33 mins |

|                        |  |
|------------------------|--|
| MAX CHARGING VOLTAGE   | 14.8 V at 25°C                                     |
| FLOAT CHARGING VOLTAGE | 13.5 V – 13.8 V at 25°C                            |
| OPERATING TEMPERATURE  | -40°C to 80°C**<br>Optimal Temperature: 25°C ± 5°C |

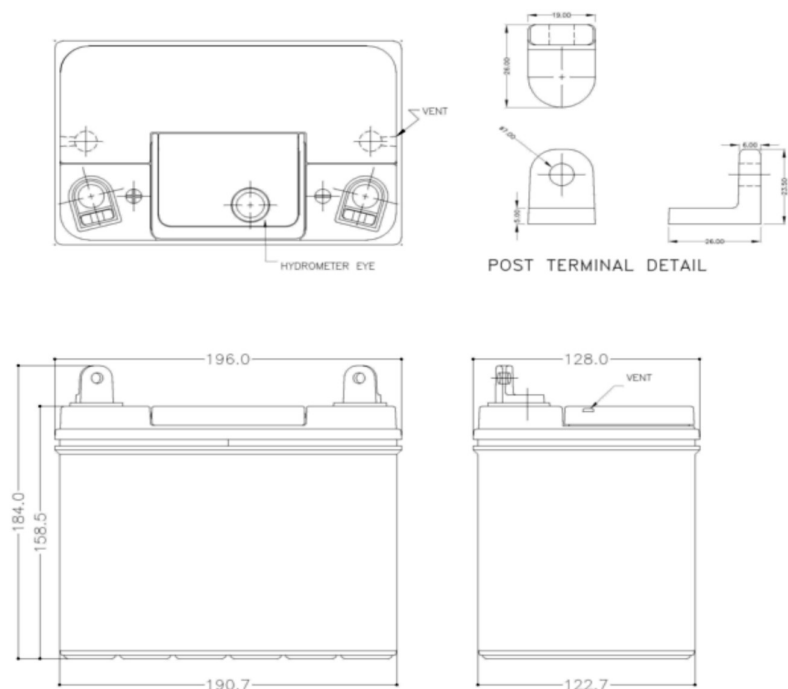

\*Warranty terms and conditions apply.

\*\*Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.