


PRODUCT DETAILS

| | | |
|-----------------------|---|--|
| PRODUCT CODE | TMNS70 |  |
| WARRANTY | 24 months (Private/Commercial Use) * | |
| CHARACTERISTIC | Accessible Maintenance Free Lead Acid Battery | |
| GROUP SIZE | N70 | |
| CASE AND LID | Material : Polypropylene (PP) | |
| | Handle : 1 pc Plastic | |
| | Ledges : Front Ledge (FL) | |
| | Venting : Centralized system with | |
| | System : Degassing vents on sides | |

DIMENSIONS, WEIGHT, AND LAYOUT


| OVERALL DIMENSIONS | METRIC |
|------------------------|--------|
| LENGTH, mm | 304 |
| WIDTH, mm | 173 |
| CASE HEIGHT, mm | 203 |
| TOTAL HEIGHT, mm | 223 |
| APPROXIMATE WEIGHT, kg | 19.37 |

| TERMINAL DATA | METRIC |
|---------------------|--|
| TYPE | SAE |
| TERMINAL HEIGHT, mm | 18.5±1.5 |
| BOTTOM DIAMETER, mm | Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3 |
| TAPER | 1:9 |
| POLARITY | D (Positive Left) |

CAPACITY SPECIFICATIONS

| | |
|---------------------------------|----------|
| COLD CRANKING AMPS (CCA) | 630 CCA |
| AMPERE-HOUR AT 20-HOUR CAPACITY | 70 Ah |
| RESERVE CAPACITY (RC) | 120 mins |

| | |
|------------------------|--|
| MAX CHARGING VOLTAGE | 14.8 V at 25°C |
| FLOAT CHARGING VOLTAGE | 13.5 V – 13.8 V at 25°C |
| OPERATING TEMPERATURE | -40°C to 80°C** Optimal Temperature: 25°C ± 5°C |

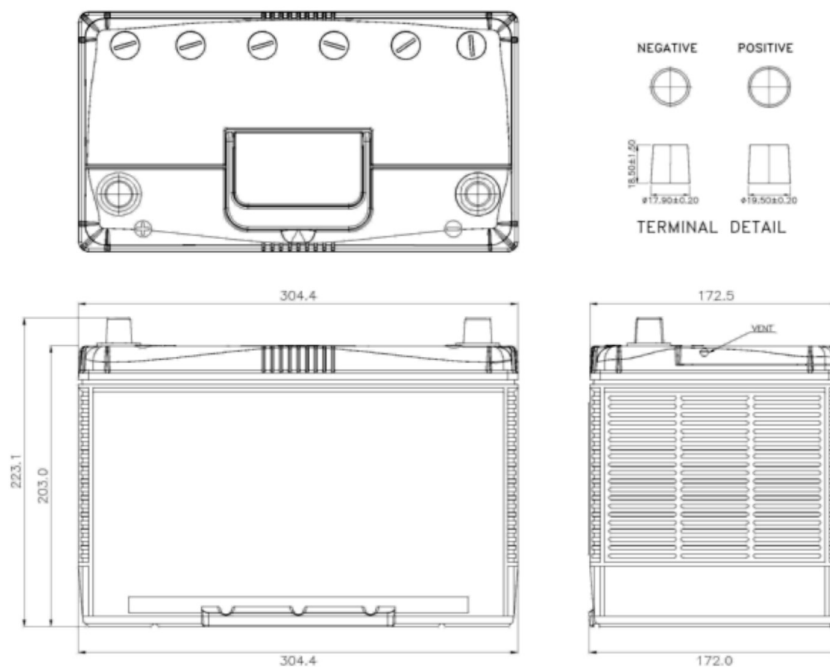

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.