




Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	12.0Ah@20hr-rate to 1.75V per cell @25 °C
Weight	Approx. 1.60 Kg (Tolerance $\pm 3.0\%$)
Internal Resistance	Approx. 9 m Ω
Terminal	T2
Max. Discharge Current	180A (5 sec)
Design Life	5 years (floating charge)
Max. Charging Current	3.6 A
Reference Capacity	C3 9.00AH
	C5 10.2AH
	C10 11.2AH
	C20 12.0AH
Float Charging Voltage	6.75 V~6.90V @ 25 °C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.20 V~7.50 V @ 25°C Temperature Compensation: -5mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C
	Charge: -20°C~40°C
	Storage: -15°C~40°C
Normal Operating Temperature Range	25°C $\pm 5^\circ\text{C}$
Self Discharge	AMP-Tech Plus (VRLA) batteries can be stored for up to 6 months at 25°C then recharging is recommended. Monthly self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



Dimensions



Length	151±2mm (5.94 inches)
Width	50.5±2mm (1.99 inches)
Height	94±2mm (3.70 inches)
Total Height	100±2mm (3.94 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

T2 Terminal

Unit: mm

Constant Current Discharge Characteristics : A(25°C)


F. V/Time	5MIN	10MIN	15MIN	20MIN	30MIN	45MIN	1HR	1.5HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.85V/cell	11.3	8.26	6.55	5.35	4.07	2.99	2.44	1.84	1.53	1.09	0.876	0.744	0.637	0.500	0.409	0.220
1.80V/cell	12.2	8.64	6.81	5.51	4.17	3.04	2.48	1.87	1.56	1.11	0.888	0.755	0.645	0.507	0.413	0.222
1.75V/cell	13.1	9.10	7.06	5.68	4.27	3.11	2.53	1.90	1.58	1.13	0.900	0.765	0.653	0.513	0.419	0.225
1.70V/cell	14.1	9.50	7.31	5.84	4.37	3.16	2.57	1.94	1.61	1.14	0.910	0.775	0.662	0.519	0.424	0.227
1.67V/cell	14.8	9.80	7.46	5.95	4.43	3.20	2.60	1.95	1.62	1.15	0.920	0.780	0.667	0.523	0.427	0.229
1.60V/cell	16.0	10.4	7.80	6.17	4.56	3.29	2.66	2.00	1.66	1.17	0.940	0.795	0.679	0.532	0.433	0.231

Constant Power Discharge Characteristics : WPC(25°C)


F. V/Time	5MIN	10MIN	15MIN	20MIN	30MIN	45MIN	1HR	1.5HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.85V/cell	21.3	15.8	12.6	10.3	7.86	5.79	4.74	3.59	3.01	2.15	1.73	1.47	1.26	0.990	0.812	0.489
1.80V/cell	23.0	16.5	13.1	10.5	8.02	5.89	4.82	3.65	3.04	2.18	1.75	1.49	1.28	1.01	0.821	0.494
1.75V/cell	24.7	17.2	13.4	10.8	8.18	5.98	4.89	3.69	3.09	2.21	1.76	1.50	1.29	1.02	0.831	0.499
1.70V/cell	26.4	17.9	13.9	11.1	8.33	6.07	4.96	3.74	3.12	2.23	1.79	1.52	1.31	1.03	0.840	0.504
1.67V/cell	27.4	18.4	14.0	11.3	8.46	6.13	5.00	3.77	3.15	2.25	1.80	1.53	1.31	1.04	0.845	0.507
1.60V/cell	29.5	19.3	14.6	11.6	8.64	6.26	5.09	3.83	3.20	2.29	1.83	1.56	1.33	1.05	0.858	0.515

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.
The battery must be fully charged before the capacity test. The C₂₀ should reach 95% after the first cycle and 100% after the third cycle.


Discharge Characteristics Curve

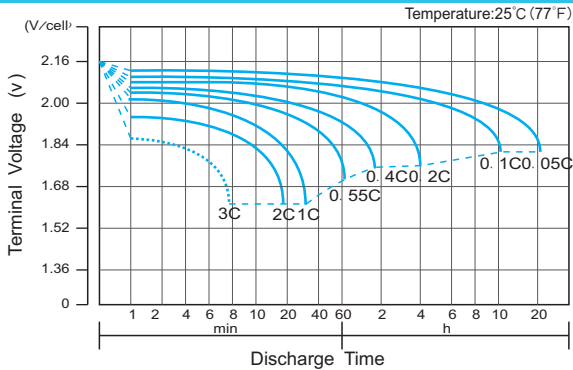


Charge Characteristic Curve for Cycle Use(IU)

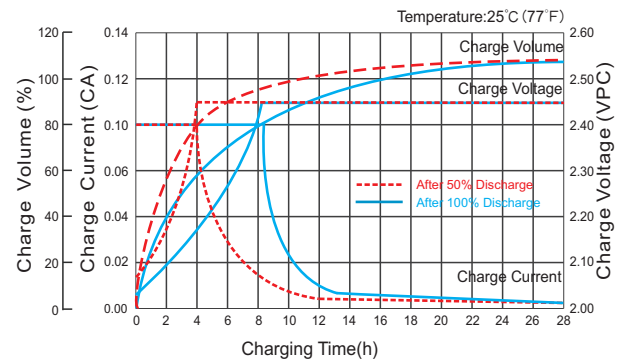


Cycle Life in Relation to Depth of Discharge

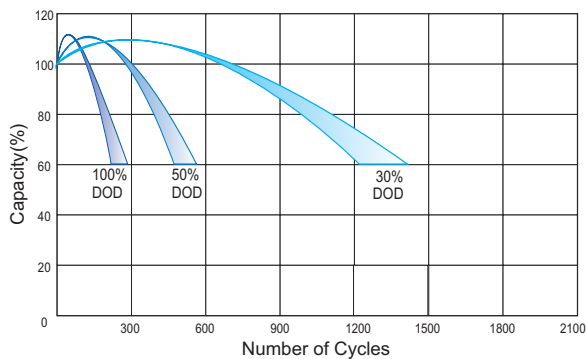


Relationship Between Charging Voltage and Temperature

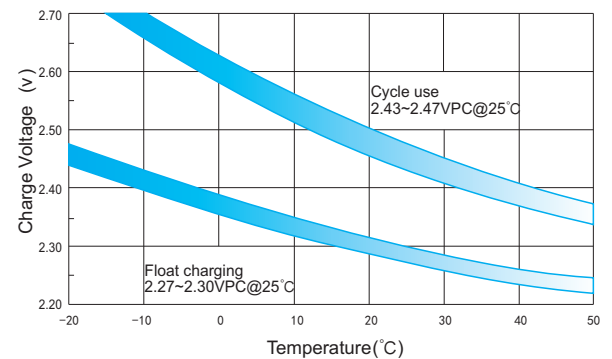


Temperature Effects on Capacity

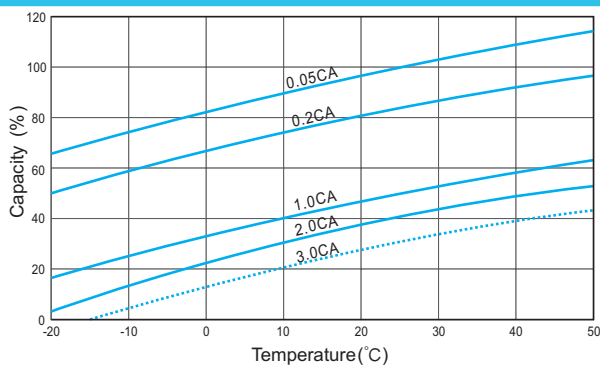

Storage Characteristics

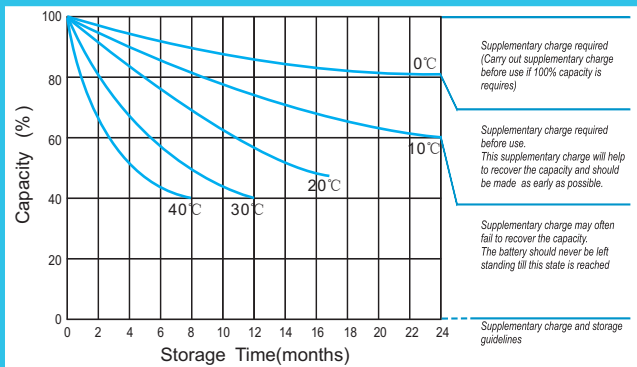

Effect of Temperature on Long Term Life

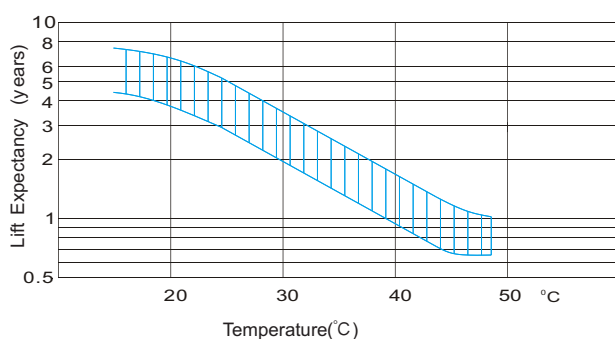

Relationship of OCV And State of Charge(20°C)

