

PRODUCT DETAILS

PRODUCT CODE	MF66H		
WARRANTY	50 months (Private Passenger Use) *		
CHARACTERISTIC	Sealed Maintenance Free Lead Acid Battery		
GROUP SIZE	LN3		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	2 pc Plastic
	Ledges	:	End and Front Ledge (EL & FL)
	Venting System	:	Centralized system with Degassing vents on sides

A black rectangular car battery with a yellow and red label. The label features the text "SUPERCHARGE 50 MONTHS BATTERIES" in yellow and red, and "GOLDPLUS" in large yellow letters with a red outline. A large yellow arrow points to the right. The battery has a black plastic handle on top and a black plastic venting system on the sides.

DIMENSIONS, WEIGHT, AND LAYOUT


OVERALL DIMENSIONS	METRIC
LENGTH, mm	271
WIDTH, mm	175
CASE HEIGHT, mm	168
TOTAL HEIGHT, mm	190
APPROXIMATE WEIGHT, kg	18.72

TERMINAL DATA	METRIC
TYPE	SAE
TERMINAL HEIGHT, mm	18.5±1.5
BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER	1:9
POLARITY	C (Positive Right)

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	800 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	90 Ah
RESERVE CAPACITY (RC)	165 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

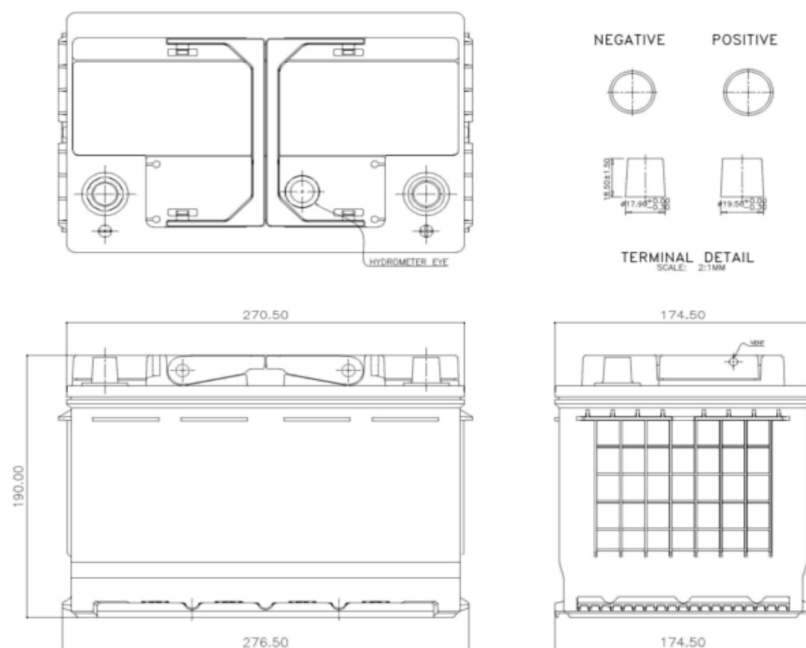

*Warranty upon registration /Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.