


**PRODUCT DETAILS**

<b>PRODUCT CODE</b>	<b>MFN150R</b>	
<b>WARRANTY</b>	24 months (Commercial Use) *	
<b>CHARACTERISTIC</b>	Sealed Maintenance Free Lead Acid Battery	
<b>GROUP SIZE</b>	G51	
<b>CASE AND LID</b>	Material : Polypropylene (PP)	
	Handle : 2 pc Rope	
	Ledges : Front No (NL)	
	Venting : Centralized system with	
	System : Degassing vents on sides	

**DIMENSIONS, WEIGHT, AND LAYOUT**


OVERALL DIMENSIONS	METRIC
<b>LENGTH, mm</b>	508
<b>WIDTH, mm</b>	220
<b>CASE HEIGHT, mm</b>	210
<b>TOTAL HEIGHT, mm</b>	236
<b>APPROXIMATE WEIGHT, kg</b>	42.38

TERMINAL DATA	METRIC
<b>TYPE</b>	SAE
<b>TERMINAL HEIGHT, mm</b>	18.5±1.5
<b>BOTTOM DIAMETER, mm</b>	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
<b>TAPER</b>	1:9
<b>POLARITY</b>	E (Positive Right)

**CAPACITY SPECIFICATIONS**

<b>COLD CRANKING AMPS (CCA)</b>	1000 CCA
<b>AMPERE-HOUR AT 20-HOUR CAPACITY</b>	165 Ah
<b>RESERVE CAPACITY (RC)</b>	330 mins

<b>MAX CHARGING VOLTAGE</b>	14.8 V at 25°C
<b>FLOAT CHARGING VOLTAGE</b>	13.5 V – 13.8 V at 25°C
<b>OPERATING TEMPERATURE</b>	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

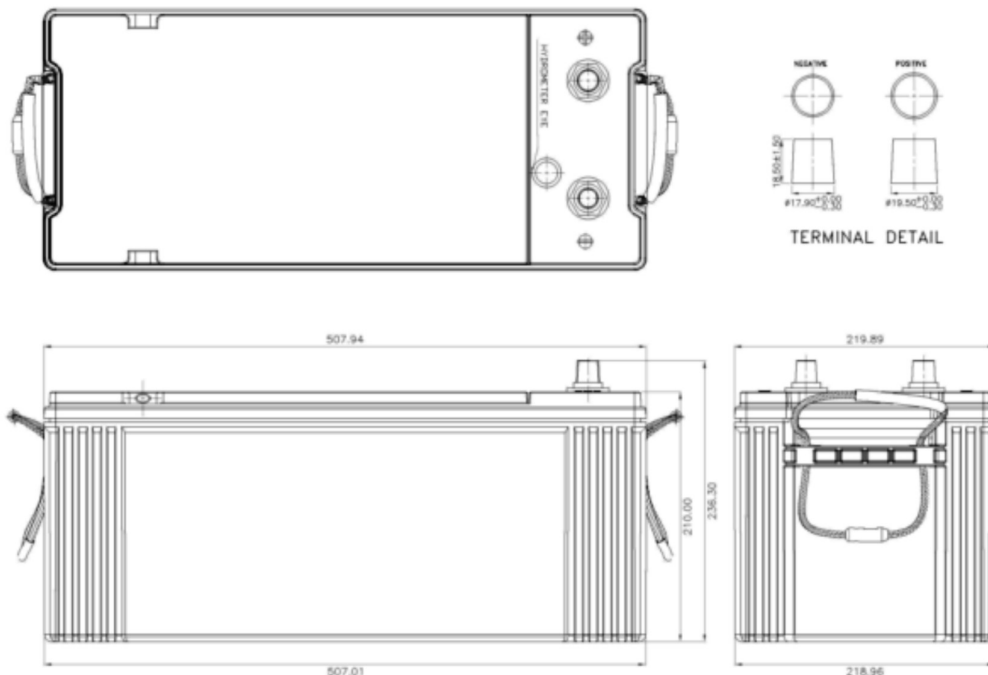

\*Warranty terms and conditions apply.

\*\*Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.