

PRODUCT DETAILS

PRODUCT CODE	MRV48		
WARRANTY	24 months (Private/Commercial Use) *		
CHARACTERISTIC	Sealed Maintenance Free Lead Acid Battery		
GROUP SIZE	A46		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	1 pc Plastic
	Ledges	:	End and Front Ledge (FL & EL)
	Venting System	:	Centralized system with Degassing vents on sides



DIMENSIONS, WEIGHT, AND LAYOUT


OVERALL DIMENSIONS	METRIC
LENGTH, mm	228
WIDTH, mm	171
CASE HEIGHT, mm	182
TOTAL HEIGHT, mm	208
APPROXIMATE WEIGHT, kg	17.09

TERMINAL DATA	METRIC
TYPE	DFA
TERMINAL HEIGHT, mm	24.0±0.2
BOTTOM DIAMETER, mm	Positive: 20.1+0/-0.2 Negative: 18.5+0/-0.2
TAPER	1:9
POLARITY	C (Positive Right)

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	525 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	60 Ah
RESERVE CAPACITY (RC)	100 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

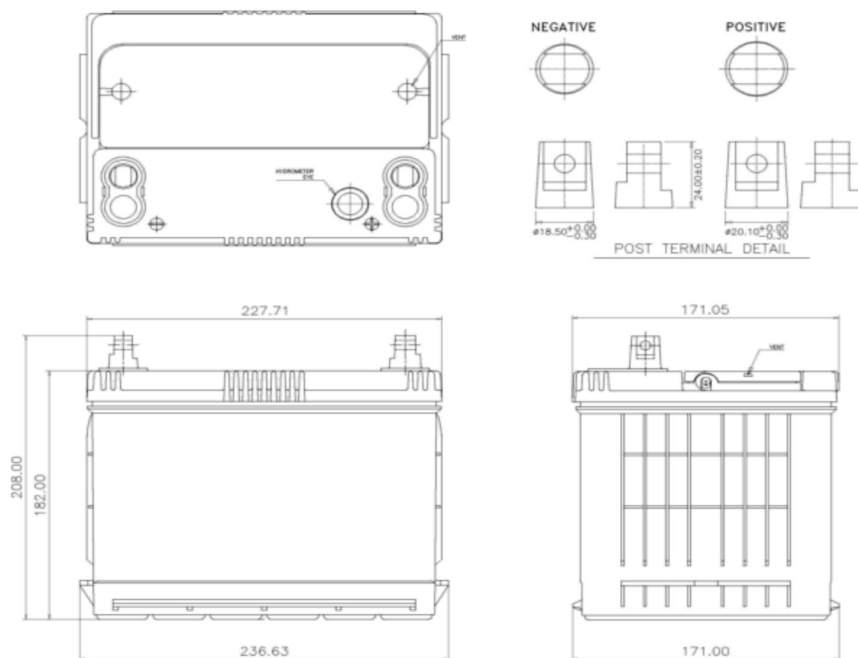

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.