

PRODUCT DETAILS

PRODUCT CODE	MF88H		
WARRANTY	40 months (Private Passenger Use) *		
CHARACTERISTIC	Sealed Maintenance Free Lead Acid Battery		
GROUP SIZE	LN5		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	2 pc Plastic
	Ledges	:	End and Front Ledge (EL & FL)
	Venting System	:	Centralized system with Degassing vents on sides




DIMENSIONS, WEIGHT, AND LAYOUT

OVERALL DIMENSIONS		METRIC	
LENGTH, mm		345	
WIDTH, mm		175	
CASE HEIGHT, mm		168	
TOTAL HEIGHT, mm		190	
APPROXIMATE WEIGHT, kg		21.97	

TERMINAL DATA		METRIC	
TYPE		SAE	
TERMINAL HEIGHT, mm		18.5±1.5	
BOTTOM DIAMETER, mm		Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3	
TAPER		1:9	
POLARITY		C (Positive Right)	

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	950 CCA	MAX CHARGING VOLTAGE	14.8 V at 25°C
AMPERE-HOUR AT 20-HOUR CAPACITY	110 Ah	FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
RESERVE CAPACITY (RC)	210 mins	OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

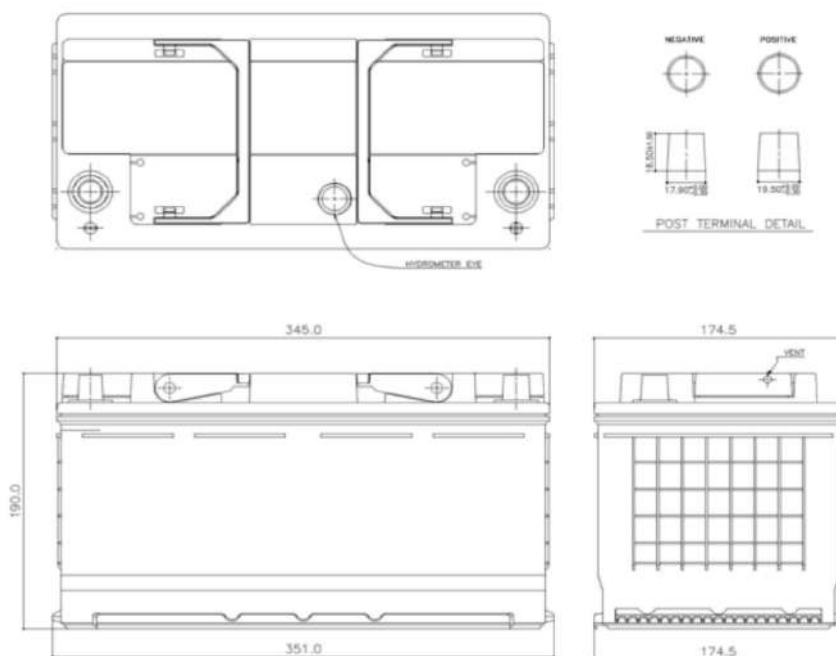

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. 23-001