


PRODUCT DETAILS

PRODUCT CODE	MFULD31L		
WARRANTY	60 months (Private Passenger Use) *		
CHARACTERISTIC	Accessible Maintenance Free Lead Acid Battery		
GROUP SIZE	N70		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	1 pc Plastic
	Ledges	:	Front Ledge (FL)
	Venting System	:	Centralized system with Degassing vents on sides




DIMENSIONS, WEIGHT, AND LAYOUT

OVERALL DIMENSIONS		TERMINAL DATA	
METRIC		METRIC	
LENGTH, mm	304	TYPE	SAE
WIDTH, mm	173	TERMINAL HEIGHT, mm	18.5±1.5
CASE HEIGHT, mm	203	BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TOTAL HEIGHT, mm	224	TAPER	1:9
APPROXIMATE WEIGHT, kg	21.4	POLARITY	C (Positive Right)

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	850 CCA	MAX CHARGING VOLTAGE	14.8 V at 25°C
AMPERE-HOUR AT 20-HOUR CAPACITY	95 Ah	FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
RESERVE CAPACITY (RC)	180 mins	OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

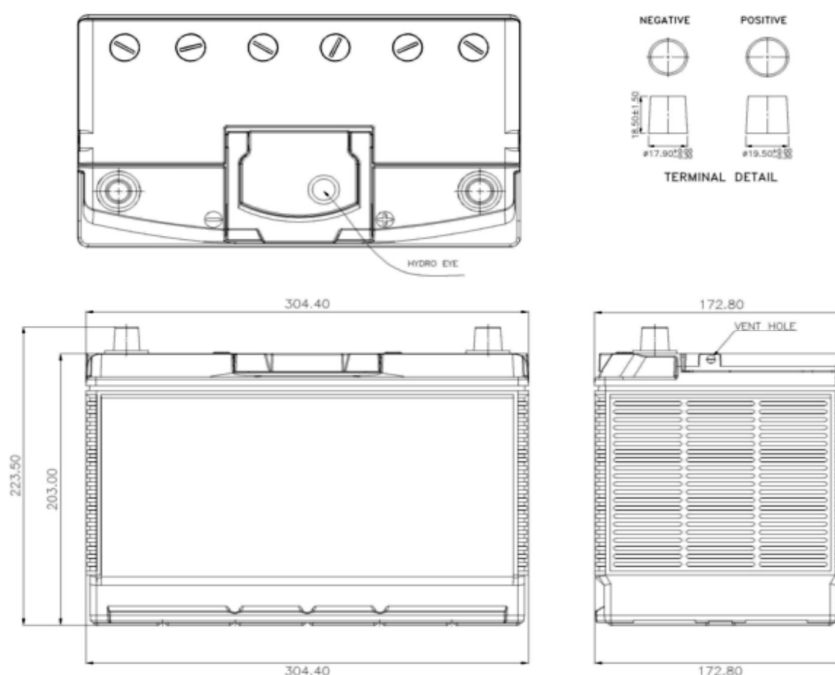

*Warranty upon registration /Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. **23-001**