

PRODUCT DETAILS

PRODUCT CODE	MFULD31R		
WARRANTY	60 months (Private Passenger Use) *		
CHARACTERISTIC	Accessible Maintenance Free Lead Acid Battery		
GROUP SIZE	N70		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	1 pc Plastic
	Ledges	:	Front Ledge (FL)
	Venting System	:	Centralized system with Degassing vents on sides



DIMENSIONS, WEIGHT, AND LAYOUT


OVERALL DIMENSIONS	METRIC
LENGTH, mm	304
WIDTH, mm	173
CASE HEIGHT, mm	203
TOTAL HEIGHT, mm	224
APPROXIMATE WEIGHT, kg	21.4

TERMINAL DATA	METRIC
TYPE	SAE
TERMINAL HEIGHT, mm	18.5±1.5
BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER	1:9
POLARITY	D (Positive Left)

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	850 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	95 Ah
RESERVE CAPACITY (RC)	180 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

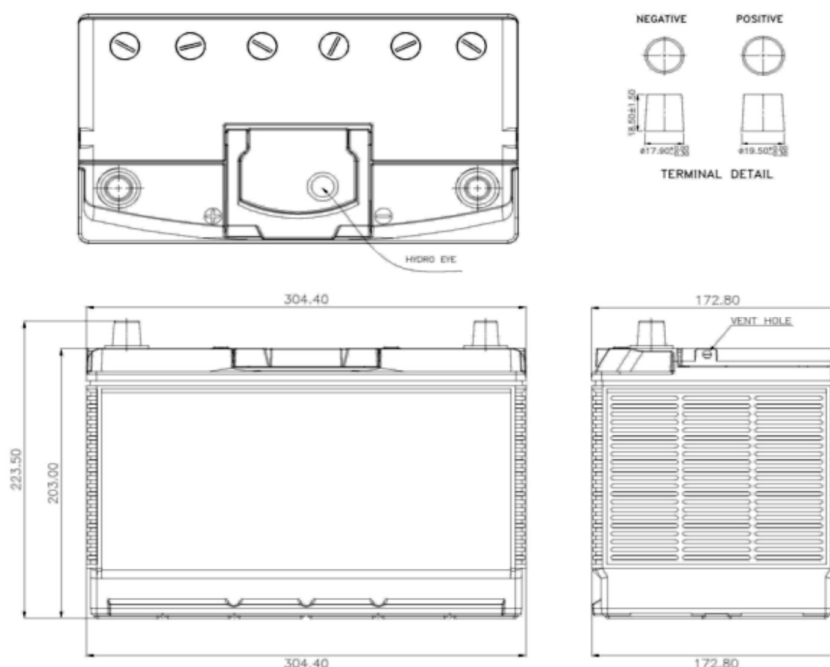

*Warranty upon registration /Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. **23-001**