


PRODUCT DETAILS

PRODUCT CODE	MFD26EF	
CHARACTERISTIC	Lead Acid (Enhanced Flooded Battery)	
GROUP SIZE	D26	
CASE AND LID	Material : Polypropylene (PP)	
	Handle : 1pc plastic	
	Ledge : Front Ledge (FL)	
	Vent : Centralised venting on sides	
		24 Months Warranty*

DIMENSIONAL SPECIFICATIONS


OVERALL DIMENSIONS	METRIC (mm)
LENGTH	258
WIDTH	172
HEIGHT (bottom to top cover)	200
TOTAL HEIGHT (bottom to top of terminal)	220
APPROXIMATE WEIGHT, kg	20.0

TERMINAL DATA	POSITIVE	NEGATIVE
TYPE	SAE	SAE
TERMINAL HEIGHT (mm)	18.5±1.50	18.5±1.50
BOTTOM DIAMETER (mm)	19.5+0/-0.3	19.5+0/-0.3
TAPER	1:9	1:9
POLARITY	C (Positive Right)	

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	700 CCA
	Test reference: AS60095:2022 Rated CCA DCH at 18°C for 30 sec
AMPERE-HOUR AT 20-HOUR CAPACITY	75 Ah
	Test reference: AS60095:2022 Rated AH DCH at 10.5 V cut-off voltage

RESERVE CAPACITY TEST	130 min
	Test reference: AS60095:2022 25Amps DCH at 10.5V cut-off voltage

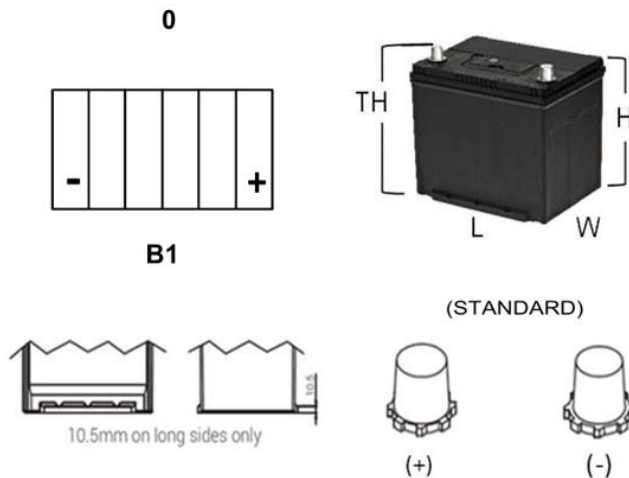

*Warranty terms and conditions apply