

PRODUCT DETAILS

PRODUCT CODE	TMN200P		
WARRANTY	18 months (Commercial Use) *		
CHARACTERISTIC	Accessible Lead Acid Battery		
GROUP SIZE	H52		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	2 pc Rope
	Ledges	:	Front No (NL)
	Venting System	:	Centralized system with Degassing vents on sides



DIMENSIONS, WEIGHT, AND LAYOUT


OVERALL DIMENSIONS	METRIC
LENGTH, mm	524
WIDTH, mm	278
CASE HEIGHT, mm	213
TOTAL HEIGHT, mm	240
APPROXIMATE WEIGHT, kg	55.37

TERMINAL DATA	METRIC
TYPE	SAE
TERMINAL HEIGHT, mm	18.5 ± 1.5
BOTTOM DIAMETER, mm	Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3
TAPER	1:9
POLARITY	E (Positive Right)

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	1200 CCA
AMPERE-HOUR AT 20-HOUR CAPACITY	210 Ah
RESERVE CAPACITY (RC)	400 mins

MAX CHARGING VOLTAGE	14.8 V at 25°C
FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

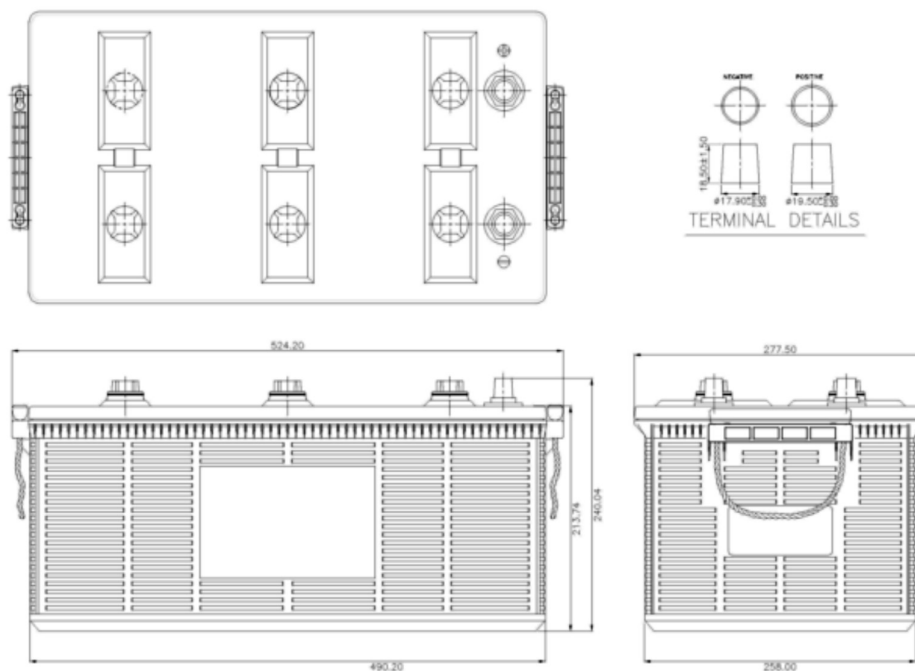

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. 23-001