

PRODUCT DETAILS

PRODUCT CODE	TMN70ZZL		
WARRANTY	24 months (Private/Commercial Use) *		
CHARACTERISTIC	Accessible Lead Acid Battery		
GROUP SIZE	N70		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	1 pc Plastic
	Ledges	:	Front Ledge (FL)
	Venting	:	Centralized system with
	System	:	Degassing vents on sides




DIMENSIONS, WEIGHT, AND LAYOUT

OVERALL DIMENSIONS		METRIC	
LENGTH, mm		304	
WIDTH, mm		173	
CASE HEIGHT, mm		203	
TOTAL HEIGHT, mm		223	
APPROXIMATE WEIGHT, kg		22.68	

TERMINAL DATA		METRIC	
TYPE		SAE	
TERMINAL HEIGHT, mm		18.5±1.5	
BOTTOM DIAMETER, mm		Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3	
TAPER		1:9	
POLARITY		C (Positive Right)	

CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	730 CCA	MAX CHARGING VOLTAGE	14.8 V at 25°C
AMPERE-HOUR AT 20-HOUR CAPACITY	80 Ah	FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
RESERVE CAPACITY (RC)	140 mins	OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

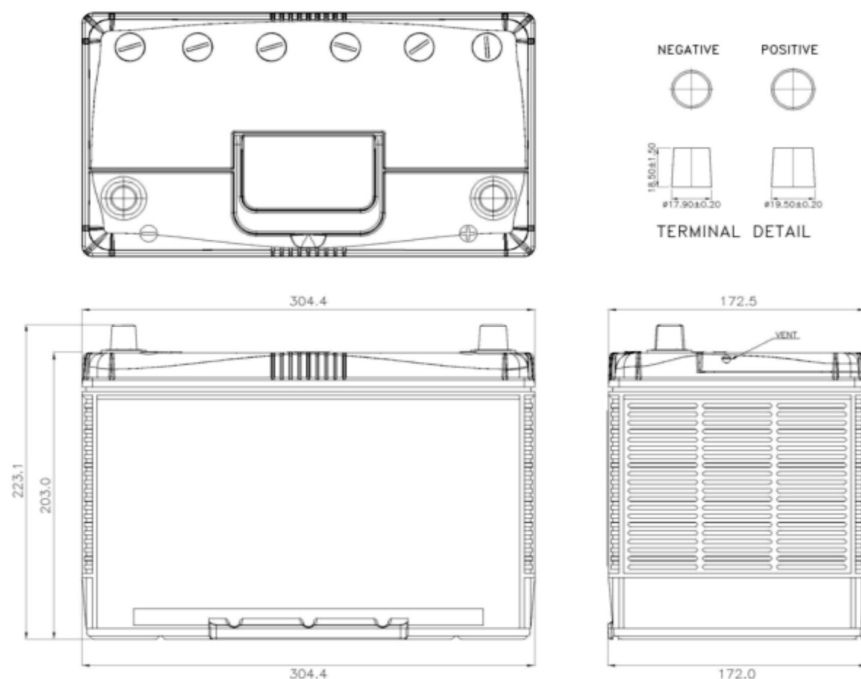

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. 23-001